

ROKAnol **L7**, ROKAnol **L7E**,
ROKAnol **L7EW/90**



ROKANol L7, ROKANol L7E and ROKANol L7EW/90

General characteristic

Basic physical and chemical properties are summarized in the table below.


	ROKANol L7	ROKANol L7E	ROKANol L7EW/90
Chemical name	Alcohols, C12-14, ethoxylated	Alcohols, C12-14, ethoxylated	Alcohols, C12-14, ethoxylated. Aqueous solution
CAS number	68439-50-9	68439-50-9	68439-50-9
INCI	Laureth-7	Laureth-7	Laureth-7 (and) Water
Appearance at temperature 40°C	clear or slightly cloudy liquid	clear or slightly cloudy liquid	clear liquid
Color (Hazen units)	max 70 (at 50°C)	max 70 (at 50°C)	max 70 (AT 40-45°C)
pH of 1% solution in deionized water, at 20°C	4.6-7.4	5-7	5-7
Cloud point, °C, Method A ¹⁾	57-61	52-59	51-59
Cloud point, °C, Method B ²⁾	42-46	40-44	42-46
Cloud point, °C, Method C ³⁾	30-40	32-36	35-39
Cloud point, °C, Method D ⁴⁾	78-82	77-81	79-83
Cloud point, °C, Method E ⁵⁾	78-82	77-81	78-82
Water, %(m/m)	max 1.0	max 0.3	9-11
Molecular weight, g/mol	approx. 500	approx. 500	approx. 500
Average degree of ethoxylation, mol EO	7	7	7
Solidification point, °C	approx. 10	approx. 10	approx. 6
Density at 30°C, g/ml	0.95-1.00	0.95-1.00	approx. 0.98
Hydrophilic-lipophilic balance (HLB)	approx. 12.9	approx. 12.9	approx. 12.9
Surface tension of 0.1% solution at 25°C, mN/m	29	30	30

1) Cloud point according to PN-EN 1890:2006; Method A – 1% in water solution
 2) Cloud point according to PN-EN 1890:2006; Method B – 1% solution in 5% NaCl solution
 3) Cloud point according to PN-EN 1890:2006; Method C – 1% solution in 10% NaCl solution
 4) Cloud point according to PN-EN 1890:2006; Method D – 10% solution in 25% BDG solution
 5) Cloud point according to PN-EN 1890:2006; Method E – 16.7% solution in 25% BDG solution

* Bolded parameters are guaranteed technical requirements


Wetting capability

In a large number of applications, the capability of effective wetting is desired property of surfactants. The wetting capability of cotton fabric was determined according to EN 1772:2001 method. Wetting time was measured in solutions with a concentration of 1.0 g/l in demineralized water at a temperature of 20°C.

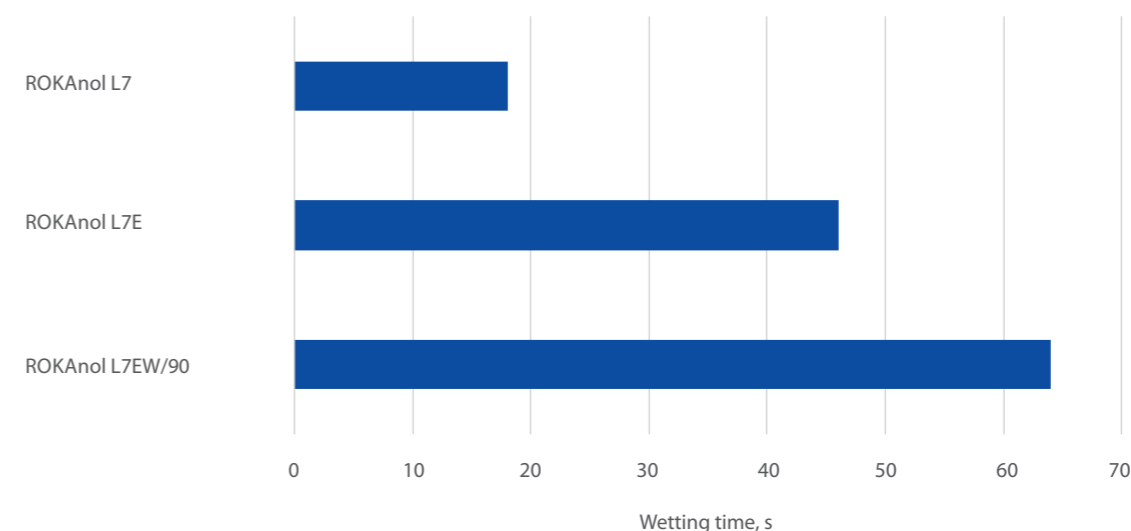

Foaming capability

Determination of the foaming capability was performed on Ross Miles Foam Analyzer according to ASTM D1173 for solutions with a concentration of 1.0 g/l in both hard (17°dH - calcium hardness of 3 Ca²⁺ mmol/l) and demineralized water at a temperature of 25°C.

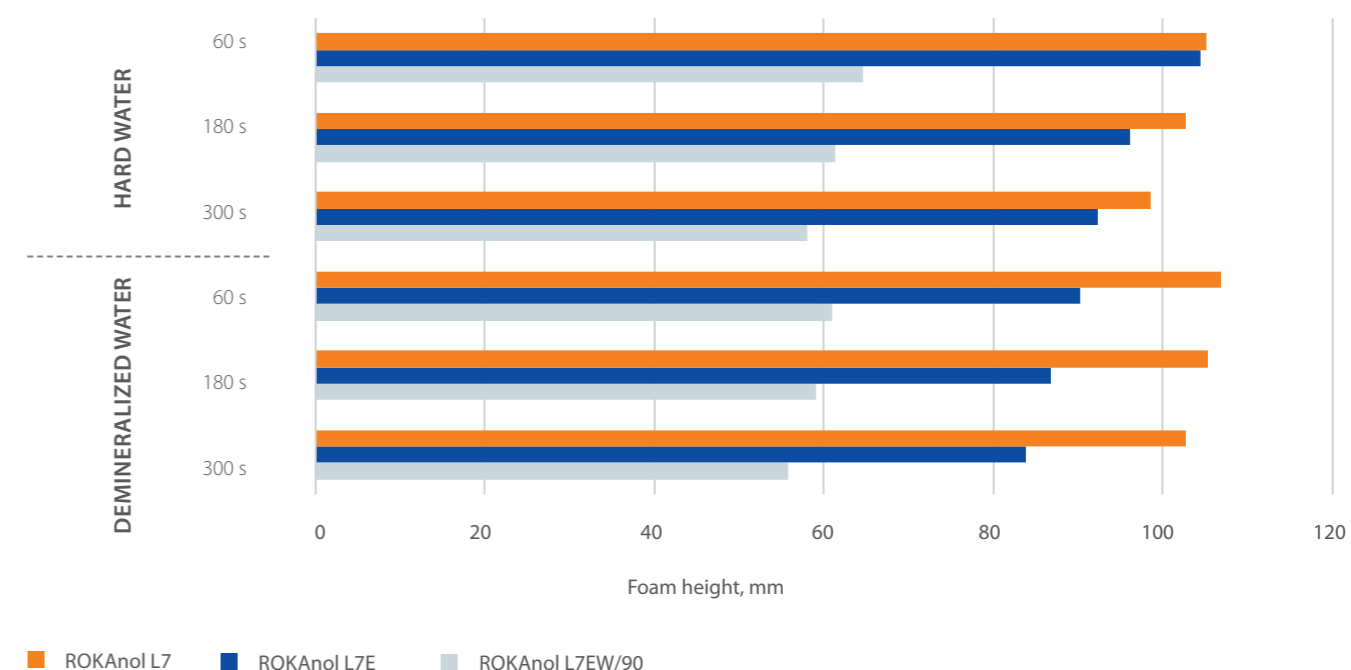

Alkali and acid resistance

Determination of capability to form stable solutions in the acid and alkaline environment was performed according to PN-EN 14712:2005 at a temperature of 20°C. Stability in the alkaline environment is defined as the maximum concentration of sodium hydroxide (with minimum purity of 98%) in g/l in a stable surfactant solution with a concentration of 1% (as active substance). Stability in the acid environment is defined as the maximum concentration of hydrochloric acid or sulfuric acid (with purity in the range between 95 and 98%) in ml/l in a stable surfactant solution with a concentration of 1% (as active substance).

Alkali resistance (Sodium Hydroxide); concentration of 1% active matter; temperature 20°C

Product name	NaOH conc. [g/l]								
	10	20	30	40	50	60	70	80	90
ROKAnol L7	•	•	•	•	•	•	•	•	•
ROKAnol L7E	•	•	•	•	•	•	•	•	•
ROKAnol L7EW/90	•	•	•	•	•	•	•	•	•

• clear, homogenous solution • homogenous, cloudy solution
 • homogenous, opalescent solution • macroscopic phase separation

Acid resistance (Sulfuric Acid); concentration of 1% active matter; temperature 20°C

Product name	H ₂ SO ₄ conc. [g/l]					
	1	5	20	40	140	225
ROKAnol L7	•	•	•	•	•	•
ROKAnol L7E	•	•	•	•	•	•
ROKAnol L7EW/90	•	•	•	•	•	•

• clear, homogenous solution • homogenous, cloudy solution
 • homogenous, opalescent solution • macroscopic phase separation


Acid resistance (Hydrochloric Acid); concentration of 1% active matter; temperature 20°C

Product name	HCl conc. [g/l]					
	1	5	20	40	140	225
ROKAnol L7	•	•	•	•	•	•
ROKAnol L7E	•	•	•	•	•	•
ROKAnol L7EW/90	•	•	•	•	•	•

• clear, homogenous solution • homogenous, cloudy solution
 • homogenous, opalescent solution • macroscopic phase separation

Detergency

Detergency is the ability of the surfactant to remove soils from the fabric surface during the laundering process. Detergency tests were performed using our own method, with an EMPA 125 fabric: soiled with a mixture of oils and carbon black. Cotton was washed at a temperature 40°C in ROKAnol L7, ROKAnol L7E i ROKAnol L7EW/90 series solutions. After drying the fabrics and pressing them, the total color difference of the fabric before and after washing, was measured. The higher the difference is, the better detergency properties are for surfactant.

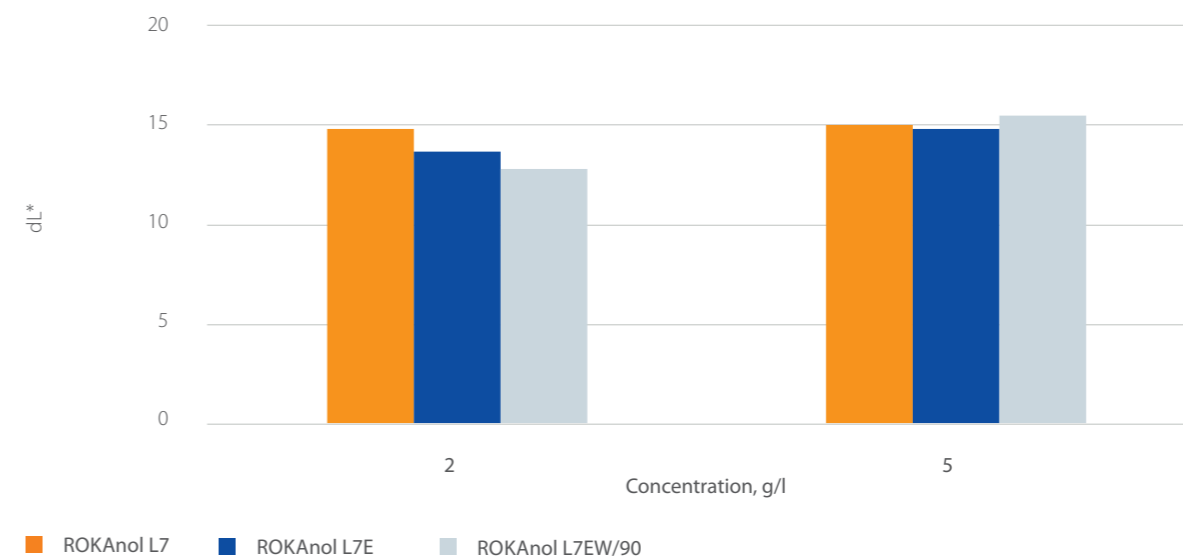

The dL* parameter is described by perceptually uniform, trichromatic color models: CIE LAB and CIE LCH. The following is an interpretation of this parameter: L is defined as lightness (luminosity), while dL is determined by the equation: $dL^* = L^*T - L^*S$ where: T – tested sample (fabric after the detergency test), S – standard to which the tested sample is compared (fabric before the detergency test). The higher the dL* value, the better the detergent effectiveness.



Solubility

Determination of the solubility of products is carried out by visual evaluation of 1%, 10% and 50% solutions of a given product in a specified solvent, 24 hours after their preparation. Visually, the appearance of the sample is evaluated according to the following scale:

Result	1	2	3	4
Appearance of the test sample	Homogeneous clear	Homogeneous opalescent	Homogeneous cloudy	Macroscopic phase separation

The results of the samples (1%, 10% and 50%) are added up and on this basis the solubility of the product is determined. The following table gives the solubility scales according to the sum of the appearance scale results:

Sum	3-6	7-9	10-12
Solubility	Soluble	Partially soluble	Insoluble

Product name	Demineralized water	Methanol	Ethyl ether	Acetone
ROKAnol L7	Soluble	Soluble	Partially soluble	Soluble
ROKAnol L7E	Soluble	Soluble	Partially soluble	Soluble
ROKAnol L7EW/90	Soluble	Soluble	Insoluble	Soluble



Laundry and stain remover formulations

Examples of laundry formulations are presented below. These are two laundry formulation – laundry capsules and heavy duty liquid detergent and liquid stain remover. The table contains the percentage compositions of the formulations, below is the preparation method.

Laundry capsules, LC				
Compound	Brand name	LC/L7	LC/L7E	LC/L7EW/90
		Concentration [%]		
MIPA Laureth Sulfate (and) Propylene Glycol	SULFOROKAnol L290/1M		40.00	
Laureth-7	ROKAnol L7	32.00	-	-
Laureth-7	ROKAnol L7E	-	32.00	-
Laureth-7, Aqua	ROKAnol L7EW/90	-	-	35.60
Glycerin	-		17.95	
Tetrasodium Glutamate Diacetate	-		4.00	
Enzymes	-		1.00	
Fluorescent brightener	-		0.05	
Sodium Hydroxide	-		for pH 8.0-8.5	
Aqua	-		5.00	1.40

1. Mix Fluorescent brightener with water until dissolved.
2. Add Glycerin and GLDA-Na₄, mix.
3. Add ROKAnol L7/ ROKAnol L7E/ ROKAnol L7EW/90 and mix.
4. Then add SULFOROKAnol L290/1M, mix.
5. Add Sodium Hydroxide to obtained pH in the mass around 8.0-8.5
6. Finally, add Enzymes and mix.

Heavy duty liquid detergent, HDLD				
Compound	Brand name	HDLD/L7	HDLD/L7E	HDLD/L7EW/90
		Concentration [%]		
Sodium Laureth Sulfate	SULFOROKAnol L227/1		30.0	
Laureth-7	ROKAnol L7	10.0	-	-
Laureth-7	ROKAnol L7E	-	10	-
Laureth-7, Aqua	ROKAnol L7EW/90	-	-	11.1
Potassium Cocoate	EXOsoft PC35		3.0	
Sodium Citrate	-		2.5	
Tetrasodium Glutamate Diacetate	-		2.0	
Enzymes	-		0.2	
Fluorescent brightener	-		0.1	
Citric Acid	-		for pH 7-8	
Aqua	-	52.2		51.1

1. Mix Fluorescent brightener with water.
2. Add Trisodium Citrate and mix until a homogeneous solution is obtained.
3. Then add SULFOROKAnol L227/1 and mix.
4. Add ROKAnol L7/ROKAnol L7E/ROKAnol L7EW/90 and mix.
5. Then add EXOsoft PC35 and mix.
6. Add GLDA-Na₄ mix.
7. Add Citric Acid to obtained pH in the mass around 7-8.
8. Finally, add Enzymes and mix until a clear liquid is obtained.

Liquid stain remover, LSR				
Compound	Brand name	LSR/L7	LSR/L7E	LSR/L7EW/90
		Concentration [%]		
Laureth-7	ROKAnol L7	11.0	-	-
Laureth-7	ROKAnol L7E	-	11.0	-
Laureth-7, Aqua	ROKAnol L7EW/90	-	-	12.2
Sodium Dodecylbenzenesulfonate	ABSNa 50		7.7	
Hydrogen Peroxide	-		30.0	
Etidronic Acid	-		4.0	
Sodium Hydroxide	-		for pH ~ 4.5	
Aqua	-	47.3		46.1

1. Mix ABSNa 50 with water.
2. Add ROKAnol L7/ ROKAnol L7E/ ROKAnol L7EW/90 and mix until a homogeneous solution is obtained.
3. Then add HEDP and mix.
4. Add Sodium Hydroxide to obtained pH in the mass around 4.5.
5. Then add Hydrogen Peroxide and until a clear liquid is obtained.



Detergency of laundry and stain remover formulations

Effectiveness of the formulation was confirmed in a detergency test. Detergency is the ability of the detergent to remove soils from the fabric surface during the laundering process. Detergency tests were performed using to own method on fabric soiled with standard, different dirt:

1. Fluid make-up, 2. Curry, 3. Blood, aged, 4. Wine, aged, 5. Spaghetti sauce with beef, 6. Chocolate ice cream, aged, 7. Grass/mud, with thickening agent, 8. Highly discriminative tea, 9. Grass, pure, 10. Baby food carrot/potato, 11. Standard clay, 12. Beta-carotene on cotton, circular stain, 13. Dirty Motor Oil (DMO), 14. Butterfat with colorant, 15. Beef fat, colored with Sudan Red.

Tested dirt divided into three categories:

Enzymatic

- Blood, aged
- Chocolate ice cream, aged

Bleachable

- Curry
- Wine, aged
- Grass/mud, with thickening agent
- Highly discriminative tea
- Grass, pure
- Standard clay
- Beta-carotene on cotton, circular stain
- Baby food carrot/potato

Greasy

- Fluid make-up
- Spaghetti sauce with beef
- Butter with colorant
- Beef fat, colored with Sudan Red
- Dirty Motor Oil (DMO)




Detergency test was performed under the following conditions:


- automatic washing machine
- water hardness (13 °dH)
- cotton program, 40°C
- load – dry, white towels
 - 2 kg for HDLD
 - 2.5 kg for LC and LSR
- dose
 - HDLD – 30 ml of formulation
 - LC – 20 g of formulation
 - LSR – 100 ml + washing capsule
- fabric soiled with standard dirt

After the washing process was performed, the standardly soiled fabrics were dried and then the degree of washing was assessed by measuring parameter dE^* from the CIELab scale, as the difference between the initially stain and the degree of its washing - higher dE^* , better detergency.


Laundry capsules
(8 g/kg clothes)

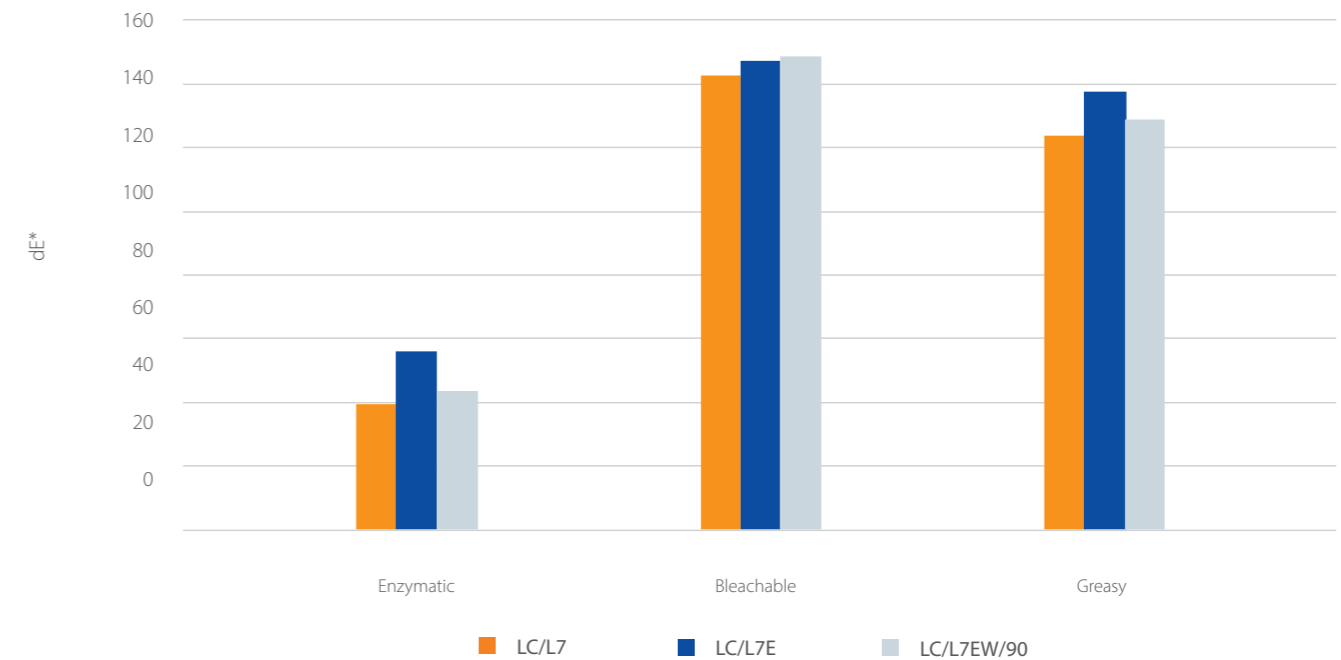

Heavy duty liquid detergents
(15 ml/kg clothes)

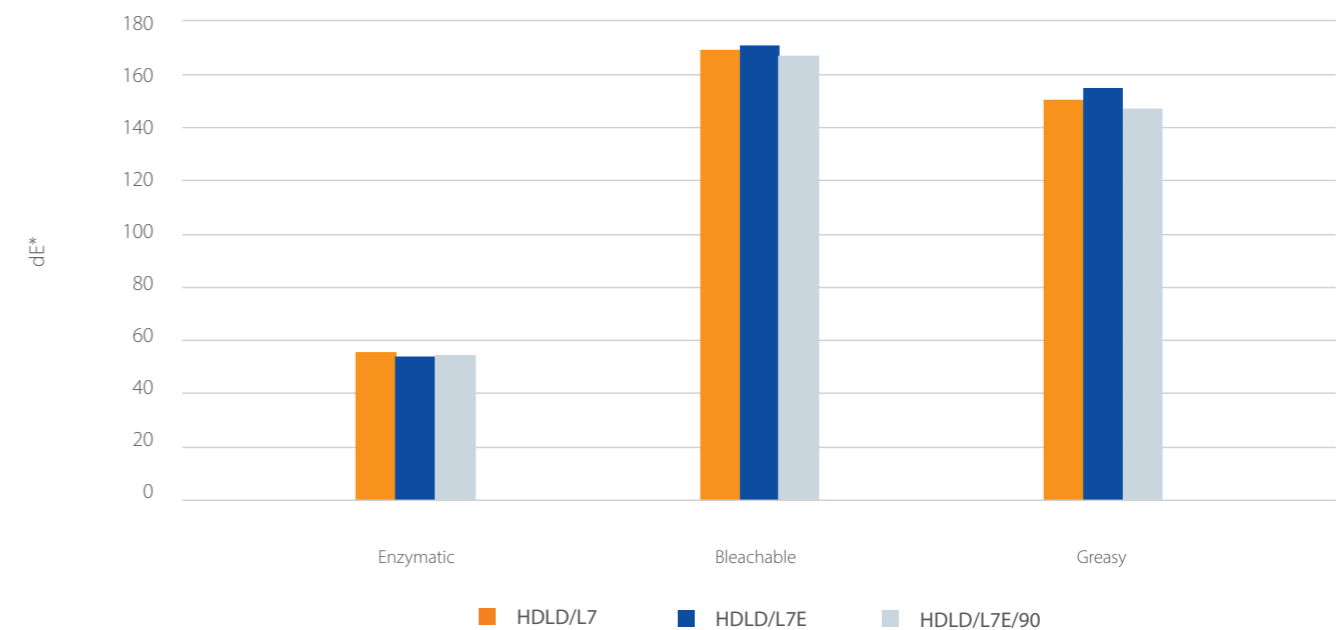

Liquid stain removers
(40 ml/kg clothes + washing capsule)

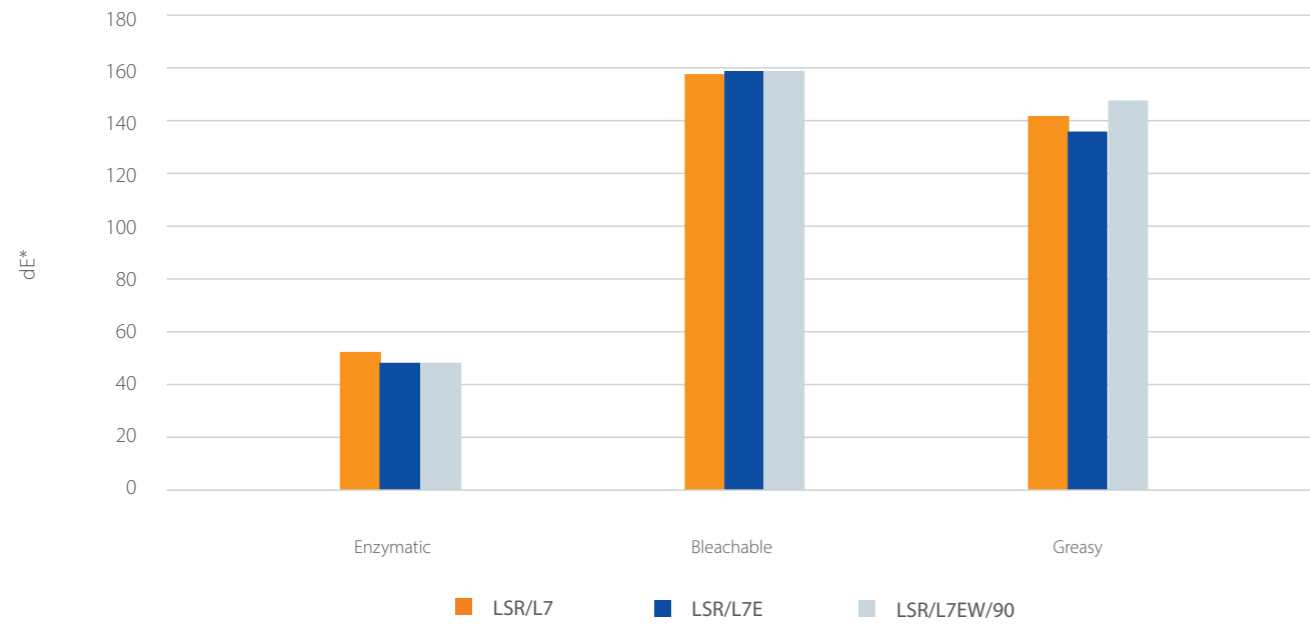


Manual dishwashing liquid formulations

1. In the table presented manual dishwashing liquid based on ROKAnol L7, ROKAnol L7E and ROKAnol L7EW/90.

Manual dishwashing liquid, MDL1				
Compound	Brand name	MDL1/L7	MDL1/L7E	MDL1/L7EW/90
		Concentration [%]		
Sodium Laureth Sulfate	SULFOROKAnol L270/1		8.0	
Cocamidopropyl Betaine	ROKAmina K30		5.0	
Cocamide DEA	ROKAmid KAD		1.0	
Laureth-7	ROKAnol L7	2.0	-	-
Laureth-7	ROKAnol L7E	-	2.0	-
Laureth-7, Aqua	ROKAnol L7EW/90	-	-	2.2
Sodium Chloride	-		2.5	
Aqua	-	81.5		81.3

Physical and chemical properties			
Appearance	clear, transparent homogenous liquid		
Viscosity, 20°C [cP]	3000-4000	400-600	300-500
pH	6-7	6-7	6-7

The foaming properties was measured for samples: MDL1/L7, MDL1/L7E, MDL1/L7EW/90. The results were presented on the photos.

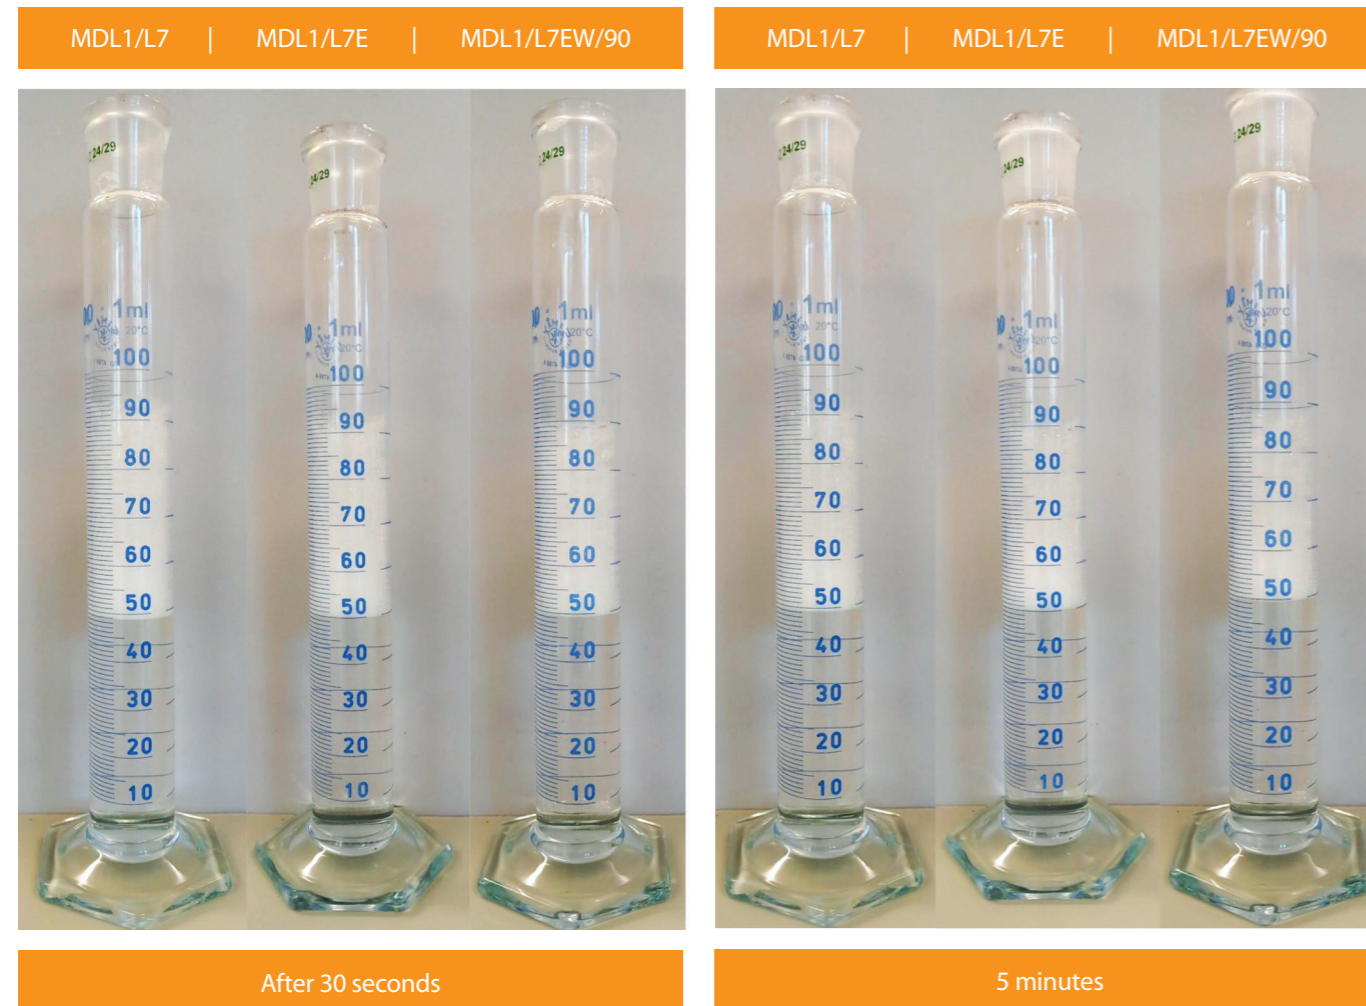

2. In below table presented similar manual dishwashing formulation but with higher organic matter. It shows, that small modification of composition allows obtained higher viscosity.

Manual dishwashing liquid, MDL2				
Compound	Brand name	MDL2/L7	MDL2/L7E	MDL2/L7EW/90
		Concentration [%]		
Sodium Laureth Sulfate	SULFOROKAnol L270/1		10.0	
Cocamidopropyl Betaine	ROKAmina K30		7.0	
Cocamide DEA	ROKAmid KAD		0.7	
Laureth-7	ROKAnol L7	1.4	-	-
Laureth-7	ROKAnol L7E	-	1.4	-
Laureth-7, Aqua	ROKAnol L7EW/90	-	-	1.6
Sodium Chloride	-		2.6	
Aqua	-		78.3	78.1

Physical and chemical properties				
Appearance	clear, transparent homogenous liquid			
Viscosity, 20°C [cP]	3500-4500	2000-3000	4000-5000	
pH	6-7	6-7	6-7	

PCC EXOL SA

Sustainable technologies for new generations



PCC EXOL SA combines innovative technologies with experience in designing, producing and selling surfactants and chemical formulations

PCC EXOL SA is a company that combines cutting-edge technologies with rich experience in production of surfactants (surface active agents). The company is located in Brzeg Dolny (Poland), where anionic, nonionic and amphoteric surfactant production plants have been launched. Due to the flexible production processes, the company offers a wide spectrum of surfactants and industrial formulations, which are often suited for the individual customers operating in plenty of various industry sectors. As one of the leading surfactant manufacturers, PCC EXOL SA carries out new investment projects and implements innovative technologies based on the global sustainability trends.

PCC EXOL SA portfolio includes surfactants with a broad range of applications. Besides of the mass production for personal care and detergents industry, the substances produced by PCC EXOL SA also include specialized products used in various branches, such as textile, agrochemical, metal cleaning, oil drilling, building & construction, paints & coatings, paper industry, extraction & drilling, and many others. The company comprehensive portfolio is continuously enriched with new innovative products, which meet even the strictest market requirements and adapt to the individual needs of customers. This is possible due to the dynamic development of the research facilities,

flexible production, knowledge as well as experienced personnel.

PCC EXOL SA has the key competence necessary for a worldwide production of surfactants. The ongoing projects will soon bring the new opportunities for the company's further development and expansion into new markets. The company offers not only a wide portfolio and professional servicing but most of all flexible production and comprehensive system solutions that meet individual customer demands. The strategic PCC EXOL SA investor is PCC SE, operating on international markets of the chemical raw materials, transport, energy, coal,

coke, petrol, plastics and metallurgy. PCC SE includes 80 companies operating in 39 different locations in 17 countries.



In accordance with our environmental concerns, this publication from the PCC Group was printed on Cocoon Silk - ecological double-sided-coated matt paper. This paper is made of 100% waste paper using an environmentally friendly technology. The FSC® Certificate confirms that the raw materials used in the paper production process come from well-managed forests or other certified and controlled sources.

TEXT PAGES

Brand	Cocoon Silk
Grammage	150
Number of pages	12





COVER PAGES

Brand	Cocoon Silk
Grammage	250
Number of pages	4

PUBLICATION

Size (cm)	21 x 29.7
Quantity	100

By using Cocoon Silk rather than non-recycled paper, the environmental impact was reduced by:

- 11  kg of landfill
- 1  kg CO₂ and greenhouse gases
- 15  km in an average European car
- 447  litres of water
- 24  kWh of energy
- 18  kg of wood

Carbon footprint data evaluated by Labelia Conseil in accordance with the Bilan Carbone® methodology. Calculations are based on a comparison between recycled paper versus virgin fibre paper - according to the latest European BREF data (virgin fibre paper) available.



PCC EXOL SA
Sienkiewicza 4
56-120 Brzeg Dolny
Poland

September 2024

Please visit our capital group business platform:
www.products.pcc.eu



Information in this catalogue is believed to be accurate and to the best of our knowledge, but should be considered as introductory only. Detailed information about our products is available in TDS and MSDS. Suggestions for product applications are based on the best of our knowledge.

The responsibility for the use of products in conformity or otherwise with the suggested application method and for determining product suitability for your own purposes rests with the user.

All copyright, trademark rights and other intellectual and industrial property rights and the resulting rights to use this publication and its contents have been transferred to PCC EXOL SA or its licensors. All rights reserved.

Users/readers are not entitled to reproduce this publication in whole or in part, nor are they entitled to reproduce it (excluding reproduction for personal use) or to transfer it to third parties.

Permission to reproduce it for personal use does not apply in respect to data used in other publications, in electronic information systems, or in other media publications. PCC EXOL SA-- shall not be responsible for data published by users.

pcc
Exol